



# CARRERA analog track

CARRERA analog track is compatible with the **common ground connection (SCP01b cartridge – positive wiring)** or the **common positive connection (SCP01c cartridge – negative wiring)**, with different SCP-1 to CARRERA connections.


Remove the banana connectors/jack from the SCP01b/SCP01c and make the connections like on table below.

CARTRIDGE	CARRERA Power & Control module					Running direction
	1	2	Black	Red	Blue	
SCP01b (positive wiring)	(-)	(+)	Black	Red	Yellow	←
SCP01c (negative wiring)	(+)	(-)	Black	White	Red	→
SCP-1 cables						

## Carrera Power & Control module

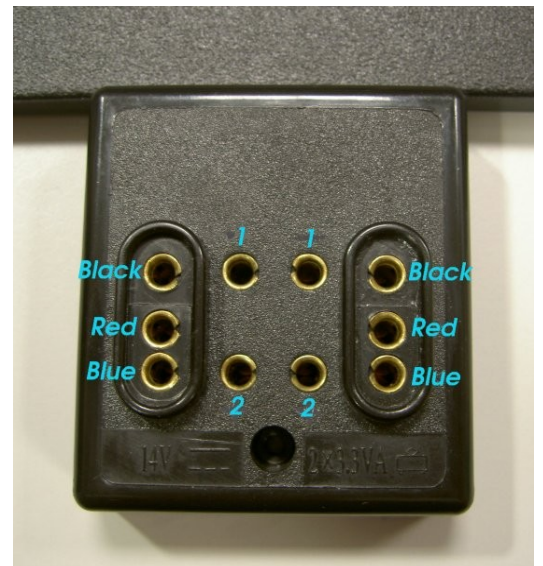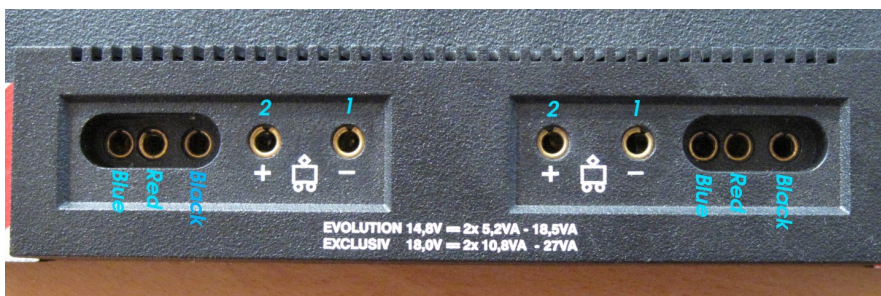

## Carrera controller's connector

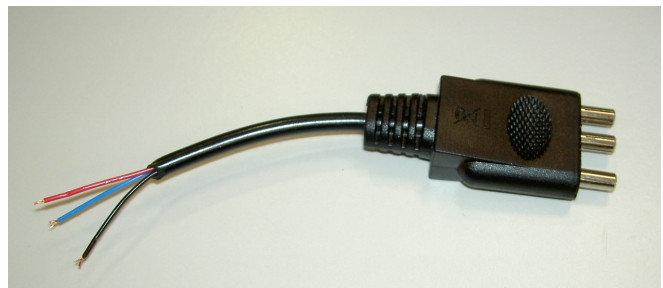




### For Advanced user only:

Both running directions are allowed for each type of analog cartridge using even a different power supply.


\*Requires wiring ability.

# CARRERA digital track

Set the jumper on the **SCP01e digital cartridge** like on table below

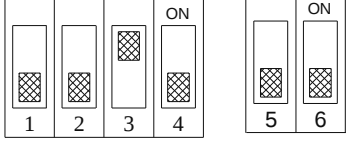	Power plug	Control plug	Dip switch
Carrera Pro-X and Digital 132	<p>Custom</p> 	<p>MMJ 6/4</p> 	<p>off off on off      off off</p> 

Connect the SCP-1 to the CARRERA digital module and power supply.

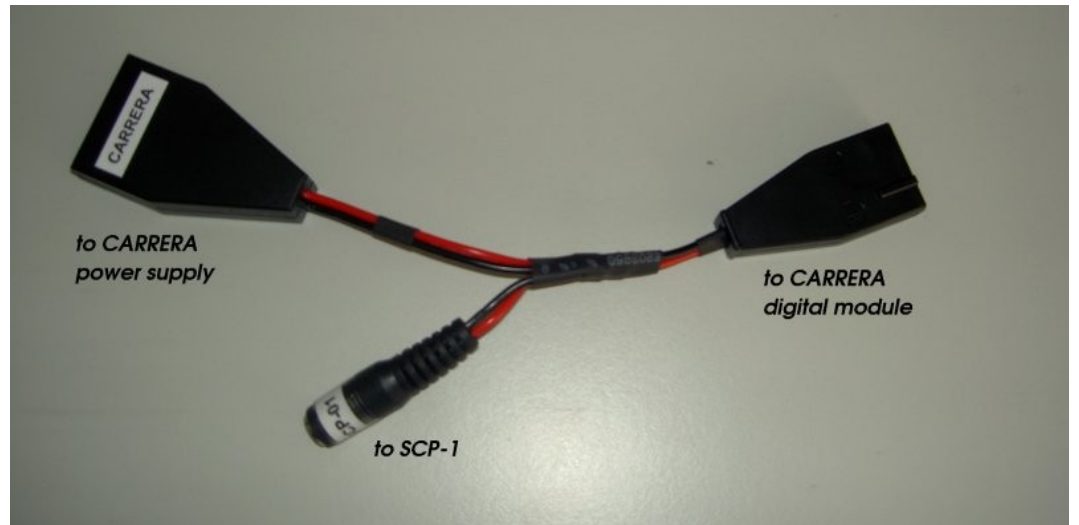

Plug the black cable from the SCP-1 cartridge (SCP01e) to the CARRERA digital module and run.

